

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Problem Image Mailbox.**



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Andrew Gensy

Dated

26 November 2003

Patents Form 1/77

Patents Act 1977
(Rule 16)

THE PATENT OFFICE

09 DEC 2002

10DEC02 E769651-0689/0
P01/7700 0.00-020654/0

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent
NP10 8QQ

- 9 DEC 2002

1. Your reference

P-UK-PR 1105

2. Patent application number
(The Patent Office will fill in this part)

0228654.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Black & Decker Inc.
Drummond Plaza Office Park
1423 Kirkwood Highway
Newark, Delaware
USA

Patents ADP number (if you know it)

341214004

If the applicant is a corporate body, give the country/state of its incorporation

Delaware, USA

4. Title of the invention

PLANNER

5. Name of your agent (if you have one)

Ian Stephen Bell

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Black & Decker
Patent Department
210 Bath Road
Slough
Berks SL1 3YD
United Kingdom

Patents ADP number (if you know it)

8130148001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form ☐ 0

Description ☐ 11

Claim(s) ☐ 3

Abstract ☐ 0

Drawing(s) ☐ 16 only

10. If you are also filing any of the following, state how many against each item.

Priority documents ☐ 0

Translations of priority documents ☐ 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) ☐ 0

Request for preliminary examination and search (Patents Form 9/77) ☐ 0

Request for substantive examination (Patents Form 10/77) ☐ 0

Any other documents (please specify) ☐ 0

11. I/We request the grant of a patent on the basis of this application

Signature I S Bell

Date: 09 December 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Ian Stephen Bell 01753 500788

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

PLANER

The present invention relates to a planer and in particular to debris collection containers for a planer and airflow and chip removal in a planer.

Planers comprise a body mounted on a shoe. A rotatable cutting drum is mounted within the body which is rotatably driven by an electric motor also mounted within the body. An aperture is formed through the shoe through which part of the periphery of the cutting drum extends. Cutting blades are mounted on the drum which, as the drum rotates, periodically pass through the aperture and below the shoe. In use, the shoe is located on a work piece and the drum is rotatably driven by the motor. When the blades pass through the aperture and move below the shoe, the blades engage with the workpiece and remove a thin slice of the workpiece from the surface of the workpiece, producing shavings or chips. Due to the rotational movement of the drum, the shavings or chips are thrown in a generally forward and upward direction in relation to the planer. One problem is the removal of the shavings or chips from the cutting area of the planer. A second problem is the collection of the shavings or chips for disposal.

In some designs of planer, the chips or shaving are directed using a deflector which directs the shavings or chips side ways from the planer. A fan or impeller mounted on the drive shaft of the motor can be used to generate an airflow which can be used to assist in the removal of the shavings or chips. DE19512262 discloses such a system. However, the problem with existing designs are that they are not efficient at mixing the air flow with the shavings or chips to entrain them for removal.

In order to collect the chips or shavings, a debris collection container is attached to the aperture through which the chips or shavings are ejected from the body of the planer. Existing designs of debris collection containers comprise a metal wire frame which is covered by a cloth bag such as a canvas bag. A tubular connector is attached to the metal wire frame and cloth bag and which can be attached to the ejection aperture so that the

chips or shavings can pass through the connector from the planer to the debris collection container. A zip is sewn into the side of the cloth bag which, when opened forms an aperture through which the shavings or chips can be emptied from the cloth bag. A problem with this design is that the hole formed by the unopened zip is narrow making emptying the bag difficult. Furthermore, it is difficult for an operator to insert a hand into the bag to assist in the removal of the shavings or chips. The zip can also scratch the hand of the operator. The shavings or chips can further interfere with the operation of the zip.

Accordingly there is provided a debris collection container for a planer comprising a receptacle for storage of debris generated by a planer during its planing action and a connector which connects the receptacle to a planer and through which debris can pass from the a planer to the receptacle during use wherein there is provided an aperture in the receptacle through which the debris within the container can be removed which is sealed by a releaseably attachable cap.

This enables a large aperture to be provided for easier emptying of the receptacle.

A number of embodiments of the invention will now be described with reference to the following drawings of which:-

Figure 1 shows a side view of the plane with the deflector removed;

Figure 2 shows a side view of the planer with deflector inserted in the planer;

Figure 3 shows the design of deflector for use in the planer;

Figure 4 shows a design drawing of a lengthwise vertical cross section of the planer through the centre of the planer (excluding the motor and handle);

Figure 5 shows a design drawing of a lengthwise slice taken through the planer at the position indicated by dashed line Z in Figure 2 (excluding the handle);

Figure 6 shows a perspective view of the first embodiment of a debris collection container;

Figure 7 shows an exploded view of the debris collection container excluding the cloth bag and circular end piece;

Figure 8 shows a perspective view of the debris collection container with the cap detached from the receptacle;

Figure 9 shows a side view of the second embodiment of the debris collection container;

Figure 10 shows a side view of the debris collection container with the cap detached;

Figure 11 shows a sketch of the connection mechanism of the second embodiment of the debris collection container;

Figure 12 shows a sketch of a top view of the planer with a debris collection container attached;

Figure 13 shows a design drawing of a lengthwise vertical cross section of the second embodiment of the planer through the centre of the planer (excluding the motor and handle);

Figure 14 shows a design drawing of a lengthwise slice taken through the second embodiment of the planer(excluding the handle);

Figure 15 shows a second downward side view of the planer with the deflector inserted; and

Figure 16 shows a design drawing of a lengthwise slice taken through the third embodiment of the planer(excluding the handle).

A first embodiment of the planer will now be described with reference to Figure 1 to 5. The planer comprises a body 2 having a handle 4 attached to the top of the body 2. A cutting drum 6 is rotatably mounted within a recess 50 in the body 2 of the planer. The body 2 of the planer is mounted on a shoe formed from two pieces 8, 10. The rear part 8 is mounted rearwardly of the drum 6. The forward part 10 is mounted forward of the drum 6. An aperture 18 in the shoe is formed by the front 10 and rear sections of the shoe through which part 20 of the periphery of the cutting drum extends. The height of the forward part 10 of the shoe can be adjusted in relation to the body 2 by the rotation of a knob 12 mounted on the front of the body 2 of the planer. The operation of the knob 12 is well known and will not therefore be discussed any further.

Mounted within a cavity 14 of the body 2 of the planer is an electric motor (not shown). The electric motor rotatingly drives the cutting drum 6 via a drive belt (not shown). Cutting blades 16 are mounted within the cutting drum 6 and which cut the workpiece upon which the planer is mounted on the cutting drum rotates. The cutting blades, as the drum rotates, periodically pass through the aperture 18 and below the shoe to cut the workpiece in well known manner. The construction of the electric motor, the cutting drum 6, the cutting blades 16 and the belt drive system are well known in the art and are therefore not discussed any further.

Formed through the full width of the body 2 of the planer is a tubular aperture 24. A deflector 26 which is described in more detail below can be inserted into the aperture 24 from either side. This enables the shavings or chips to be directed to either side of the planer. A plastic cap (not shown) is used to seal up the other aperture.

Referring to figure 3, the deflector 26 in accordance with the present invention is shown. The deflector 26 comprises two sections 28, 30. The first outer section 28 is a tube of circular cross-section which, when the deflector 26 is inserted into the aperture 24 of the planer, projects sidewaysly from the body 2 of the planer as shown in Figure 2. The second section 30 is a curved section. The curved section has a substantially U shaped cross-section which forms a trough which curves over its length. The sides 32 of the U-shaped curved trough have been flattened as best seen in figures 4 and 5. This results in a ridge 34 along the length of the curved section 30 where the flat surface 32 meets with a curved surface 36 of the U shaped cross-section. The shape of the cross-section of the curved section 30 of the deflector 26 is such that it fits snugly into the aperture 24 in the side wall of the body 2 of the planer in order to hold the deflector securely and prevent it from rotating within the aperture 24. Formed between the two sections 28, 30 is an annular rib 38 which surrounds the circumference of the deflector 26. The outer diameter of the annular rib 38 is greater than the diameter of the aperture 24 and thus prevents the deflector 26 from being inserted too far into the planer. When the deflector 26 is located within the body 2 of the planer, the rib 38 abuts against a side wall of the body 2 of a planer, the tubular section 28 remaining outside of the body. The rib is angled 35 in

relation to the longitudinal axis 33 of the tubular section 28 so that it is less than ninety degrees as shown in Figure 3. This is to allow the tubular section to point upwards when located within the body of the planer. The deflector 26 is formed as a one-piece construction and is made from plastic moulded into the appropriate shape.

Mounted on the drive spindles of the motor is of fan (not shown) which generates an airflow. The air is directed into a cavity 40 formed in the body of the planer. The air then passes through a conduit 42 over the top wall 44 which forms the top wall of the aperture 24. The direction of the airflow is indicated by Arrows W. The airflow is then directed downwardly to an area 46 in the body 2 forward of the wall 48 of the recess 50 in which the drum 6 is mounted. An expulsion aperture 52 is formed in the wall 48 of the recess 52 forward of the cutting drum 6 through which any debris created by the cutting action of the blades 16 would be thrown by the rotating blades 16. The airflow is directed within the body to a point below the expulsion aperture 52 in the wall of the recess and is directed to be blown across the aperture 52 within the body in a direction having an acute angle to the direction of travel of any debris (shown by Arrow T) in order to entrain the debris in the airflow within the body.

The airflow and entrained debris is directed upwardly until it engages with the underside of the curved section 30 of the deflector 26 which is located within the aperture 24 when the planer is in use. The airflow and entrained debris is then directed out of the side of the planer through the tubular section 28 and into a debris collection container.

A second embodiment of the planer will now be described with reference to Figures 13 to 15. Where the same features are shown in second embodiment as those in the first, the same reference numbers have been used. The second embodiment is exactly the same as the first embodiment except that the curved section 30 of the deflector forms the lower wall of the conduit 42 through which the airflow is directed over the deflector 26. The aperture has no upper wall within the body 2 of the planer.

When the deflector 26 is located within the aperture 24, the flat side walls 32 of the deflector 26 engage with internal walls 54 of the body and form an air tight seal preventing air which is passing over the deflector 26 from travelling between the flat walls 32 of the deflector and the internal wall 52 of the body ensuring it travels forward and downward to the point 46 below the expulsion aperture 52 for entraining of the debris.

Because the deflector 26 is angled downwardly by the angle 35 of the rib 38 being non perpendicular to the longitudinal axis 33 of the deflector, a large cavity is formed above the deflector 26 allowing air to easily pass over the top of the deflector 26. Figure 15 shows a planer according to the second embodiment. The curve section 30 can be seen through the entrance of the aperture 24.

A third embodiment of the planer will now be described with reference to Figure 16. Where the same features are shown in second embodiment as those in the first, the same reference numbers have been used. The second embodiment is exactly the same as the first embodiment except that a secondary vent 56 has been added within the body above the area 46 in the body 2 forward of the wall 48 of the recess 50 in which the drum 6 is mounted. The secondary vent 56 directs air into the path of the air with entrained debris at an acute angle approximately at the same height as the top of the expulsion aperture 52 formed in the wall 48 of the recess 52 forward of the cutting drum 6 through which any debris created by the cutting action of the blades 16 would be thrown by the rotating blades 16. It will be appreciated that the vent 56 can be located slightly lower down relative to the adjacent the aperture 52.

Figures 6 to 8 show the first design of debris collection container which can be used with any of the three embodiments of planer previously described. The debris collection container comprises two sections, an end cap section 60 and the receptacle 70. The end cap section 60 is manufactured in a one-piece construction from transparent plastic. The end cap section 60 comprises a tubular connection section 62 which connects to the first tubular section 28 of the deflector 26. The tubular connection section 62 has a circular

aperture (not shown) at one end whilst the other end meets with a dome shaped section or part spherical section 64. The dome shaped section 64 comprises a rim 66 which surrounds a large aperture formed in the base of the dome shape section 64. The rim 66 comprises an L-shaped slot 68 which forms part of a bayonet connection system for use in connecting the end cap section 60 to the receptacle 70. Air and entrained debris pass through the aperture in the end of the tubular connection section 62, through the tubular connection section 62 and into the dome shape section 64 before being expelled from the end cap section 60 through the large aperture in the base of the dome 64. The shape of the dome is such that it acts as a deflector, bending the air and entrained debris through ninety degrees so that the air and entrained debris are travelling perpendicular to the direction they were travelling in when they were passing through the tubular connection section 62. By constructing the dome shape section 64 in transparent plastic, the operator of the planer can look into the debris collection container to determine how full container is. Furthermore, as the planer is operating, the operator will be able to see the entrained debris passing through the tubular connection section 62 and pass through the dome section thereby enabling the operator to see that the planer is working correctly.

The receptacle 70 comprises a one end an annular plastic ring 72 which surrounds a large circular aperture which forms of the entrance to the receptacle 70. The annular plastic ring 72 is divided lengthwise into two halves, a front half 74 having a diameter less than that of the in the diameter of the rim 66 of the dome shaped section 64 of the end cap section 60, and a second rear half 76 having a diameter equal to that of the outer diameter of the rim of the dome shape section 64 of the end cap section 60. A lip 78 is formed between the front and rear sections 74, 76 which abuts against the side of the rim of the dome shaped section 64 of the end cap section 60 when the end cap section is connected to the receptacle. Two pins 80 project radially outwardly from the surface of the front half. The pins are used as part of a bayonet connection to connect the end cap section to the receptacle by sliding into the L-shaped slot 68 formed in the rim 66 of the end cap section in connecting receptacle to the end cap section 60 in well known manner.

Located at the other end of the receptacle is a circular end piece 82 formed from plastic. The circular end piece forms a base of the receptacle and can be manufactured from transparent plastic material to enable an operator to view inside the receptacle from the base. The circular end piece 82 has a diameter which is the same as that of the annular plastic ring 72. A helical spring 84 having the same diameter as that of the annular plastic ring 72 and the circular end piece 82 connects between the annular plastic ring 72 and the circular end piece 82 and holds the relative positions of the two parts. A tubular shaped cloth bag 86 connects between the plastic annular ring 72 and the circular end piece 82 and surrounds the helical spring. The spring acts to maintain the shape of the circular receptacle and to keep the circular cloth sheaf in shape.

Formed on the annular plastic ring is a plastic catch 88. Formed on the circular end piece is a U-shaped plastic loop 90 which extends from that the circular end piece 82 towards the annular plastic ring 72. The location of the U-shaped plastic loop 90 results in that when that the helical spring 84 is compressed by moving the circular end piece 82 towards the annular plastic ring 72, the loop 90 engages with and attaches to the plastic catch 88. This is ideal for storage. During use, the U-shaped plastic loop 90 is released from the catch and allows the helical spring 84 to bias the circular end piece 82 away from the annular plastic ring 72 to maximise the volume of space within the receptacle 70. The helical spring maintains the shape of the receptacle the relative positions of the plastic annular is ring 72 and the circular end piece 82. However, due to the resilient nature of the helical spring 84, the structure allows some relative movements between the two enabling flexibility within the receptacle. However, when the receptacle is not in use, the helical spring 84 can be compressed so that the circular end piece 82 is moved towards the annular plastic ring 72 until the U-shaped plastic loop 90 engages with the plastic catch 88 to secure the circular end piece 82 to the annular ring 72 maintaining the helical spring 84 under compression and substantially reducing the volume of the space within the receptacle. This is ideal for storage purposes.

In use, the tubular connection section of the end cap is connected to the deflector 26 on the planer. The receptacle 70 is connected to the end cap section by use of the bayonet

connector. The circular end piece 82 is disconnected from the catch 88 on the annular plastic ring 72 to allow the helical spring 84 to bias the circular end piece 82 away from the plastic annular ring 72 generating the shape of the container.

Referring to figures 9 to 11, a second design of debris collection container is shown. The debris collection container comprises an end cap 100 and a receptacle 102 which is capable of being attached to the end cap 100. The end cap 100 is manufactured in a one-piece construction from transparent plastic. The end cap 100 comprises a tubular connection section 104 which connects to the first outer section 28 of the deflector 26. The tubular connection section 104 has a circular aperture at one end whilst the other end meets with a dome shaped or semi-spherical section 106. The dome shape section 106 is mounted on a rectangular base 108 which comprises a rectangular rim 110 which surrounds a large aperture formed in the base of the dome shape section 106. The rim 110 comprises a T-shaped slot 112 which forms part of a connection system for use in connecting the end cap 100 to the receptacle 102. Air and entrained debris pass through the aperture in the end of the tubular connection section 104, through the tubular connection section and into the dome shape section 106 before being expelled from the end cap 100 through the large aperture in the base 108 of the dome. The shape of the dome 106 is such that it acts as a deflector for the air and entrained debris and causes it to bend through ninety degrees so that the air and entrained debris are travelling perpendicular to the direction they were travelling in when they were passing through the tubular connection section 104. By constructing the end cap 100 in transparent plastic, the operator of the planer can look into the debris collection container to determine how full the container is. Furthermore, as the planer is operating, the operator will be able to see the entrained debris passing through the tubular connection section and pass through the dome section thereby enabling the operator to see that the planer is working correctly.

The receptacle comprises a rectangular plastic frame 114 which acts as an entrance for the receptacle 102. Attached to the rectangular plastic frame 114 is a large rectangular metal frame (not shown) made from stiff metal wire which forms of the structure of the receptacle. Attached to the rectangular plastic frame 114 and covering the large

rectangular metal frame is a bag 116 made from cloth. The use of a cloth bag covering a metal frame is well known whether such will not be discussed any further.

Mounted within the rectangular plastic frame are two C shaped locking members 118 as shown in figure 11 which are used to lock the receptacle 102 to the end cap 100. The method of mounting is not shown. The two C shaped locking members 118 are mounted within the rectangular plastic frame 114 so that the ends 120 of each of the two arms of the C shaped locking members 118 face each other as shown in figure 11. Formed on the ends of the two arms of the two C shaped locking members 118 are pegs 122 which project outwardly. Helical springs 124 are mounted between the ends 120 of each pair of corresponding arms in order to bias the two C shaped locking members 118 outwardly away from each other as indicated by Arrows X. Rod 126 is mounted within the helical springs to keep the helical springs 124 in position. Holes are formed within the rectangular plastic frame to enable the fingers of an operator to engage with the two C shaped locking members to push them towards each other against the biasing force of the springs 124.

In order to attach the receptacle 102 to the end cap 100, an operator would squeeze the two C shaped locking members 118 together against the biasing force of the springs 124 moving the pegs 122 formed on the ends 120 of the arms 118 of each of the two C shaped locking mechanisms 118 towards each other. Whilst held in this position, the pegs 122 are able to pass through the entrance of the T-shaped slot 112 in the end cap 100. The operator can then push the end cap 100 towards the receptacle 102, the pegs 122 moving further into the T-shaped slot 112 until they become aligned with the top section of the T-shaped slot 112. The operator then releases the C shaped locking members 118 to allow them to move outwardly due to the biasing force of the springs 124 causing the pegs 122 to travel outwardly in the top section of the T-shaped slot 112 thus locking the receptacle 102 to the end cap 100.

Figure 12 shows the view of the second embodiment of the debris collection container attached to the planer. As can be seen, the debris collection container is located along

side the planer and the longitudinal axis 132 of the debris container extends in parallel to the longitudinal axis 130 of the planer.

CLAIMS

- 1 A debris collection container for a planer comprising a receptacle for storage of debris generated by a planer during its planing action and a connector which connects the receptacle to a planer and through which debris can pass from the a planer to the receptacle during use wherein there is provided an aperture in the receptacle through which the debris within the container can be removed which is sealed by a releasably attachable cap.
- 2 A debris collection container as claimed in claim 1 wherein the aperture is surrounded by a rim, the cap releasably attaching to the rim.
- 3 A debris collection container as claimed in either of claims 1 or 2 wherein the size of the aperture is fixed and relatively large.
- 4 A debris collection container as claimed in any of the previous claims wherein the cap attaches to the receptacle via a bayonet type connector.
- 5 A debris collection container as claimed in any of claims 1, 2 or 3 wherein the cap attaches to the receptacle by at least one connection means, the connection mean comprising two parts, a first part mounted on the receptacle, a second part on the cap; one part comprising two pegs moveable between an inner and outer positions, biasing means to resiliently bias the pegs away from each other to their outer positions; the other part comprising a T shaped slot; the two parts being connected to each other by insertion of the pegs into the entrance of the T shaped slot when the pegs are moved to their inner positions, sliding the pegs to top of the T shaped slot and allowing the biasing force of the biasing means to move the pegs to their outer positions whilst located in the top section of the T shaped slot.

6 A debris collection container as claimed in any one of the previous claims wherein the connector is integrally formed in the cap.

7 A debris collection container as claimed in any one of the previous claims wherein the connector connects to the receptacle via a part spherical shaped section which curves the direction of travel of any air or debris entrained within it as it passes through the part spherical section.

8 A debris collection container as claimed in claim 7 wherein the part spherical section curves any airflow and any entrained debris through ninety degrees.

9 A debris collection container as claimed in any one of the previous claims wherein there is provided at least one transparent window in the connector and/or the receptacle.

10 A debris collection container as claimed in claim 9 wherein all or part of the cap is transparent.

11 A debris collection container as claimed in any one of the previous claims wherein the receptacle comprises at least one resiliently deformable section which can be held compressed for reduce the size of the receptacle or released to allow deformable section to expand.

12 A debris collection container as claimed in claim 11 wherein the receptacle comprises a first rigid section, a second rigid section connected to the first rigid section via a third resiliently deformable section wherein the first section can be releasably attached to the second section when the third section is compressed.

13 A debris collection container as claimed in claim 12 wherein the first or second section comprises a hoop and the other section comprises a catch wherein the hoop engages with the catch to releasably attach the first section to the second section.

14 A debris collection container as claimed in claims 12 or 13 wherein the a third resiliently deformable section comprises a spring.

15 A debris collection container as claimed in claim 14 wherein the a spring is helical.

16 A debris collection container as claimed in claims 14 or 15 wherein the spring form part of the wall structure of the receptacle when the releasably deformable section is allowed to expand.

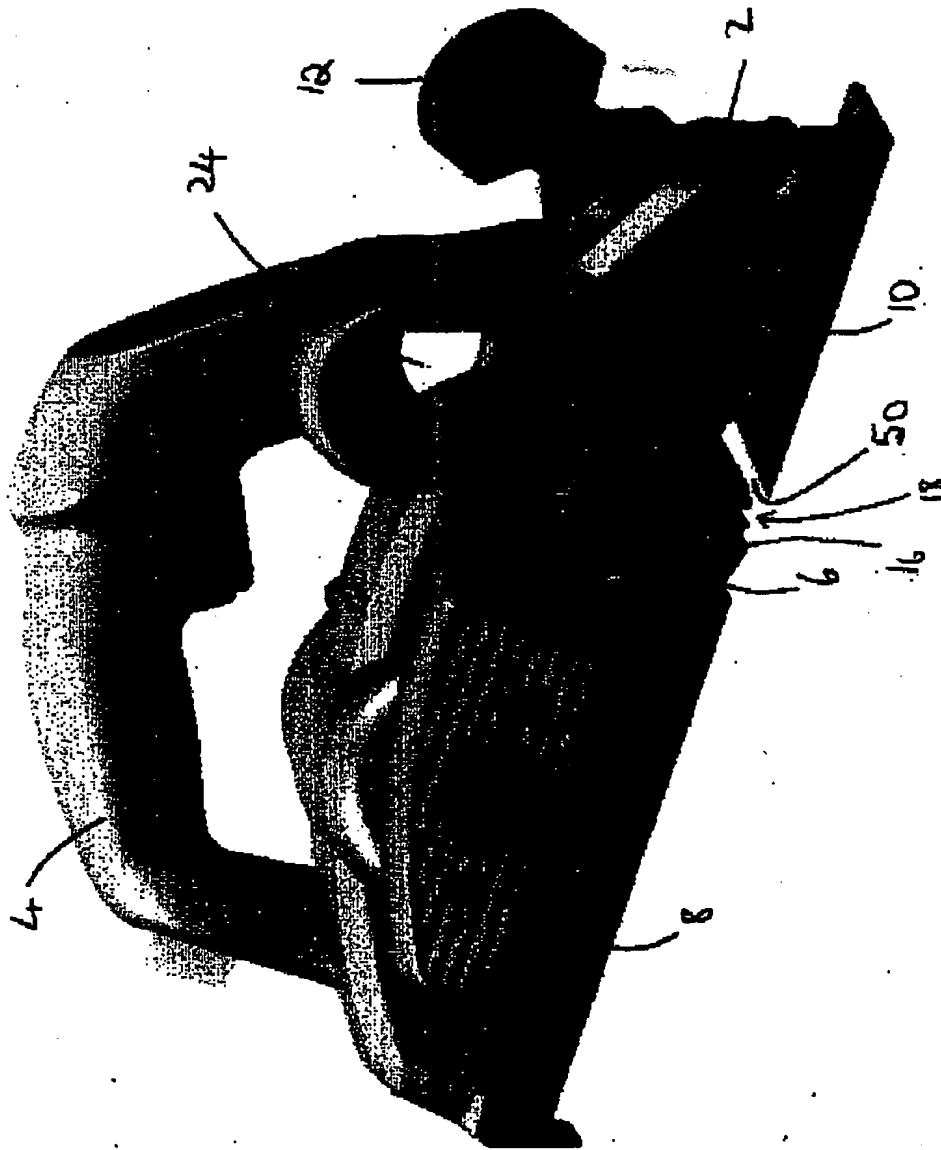


Fig 1

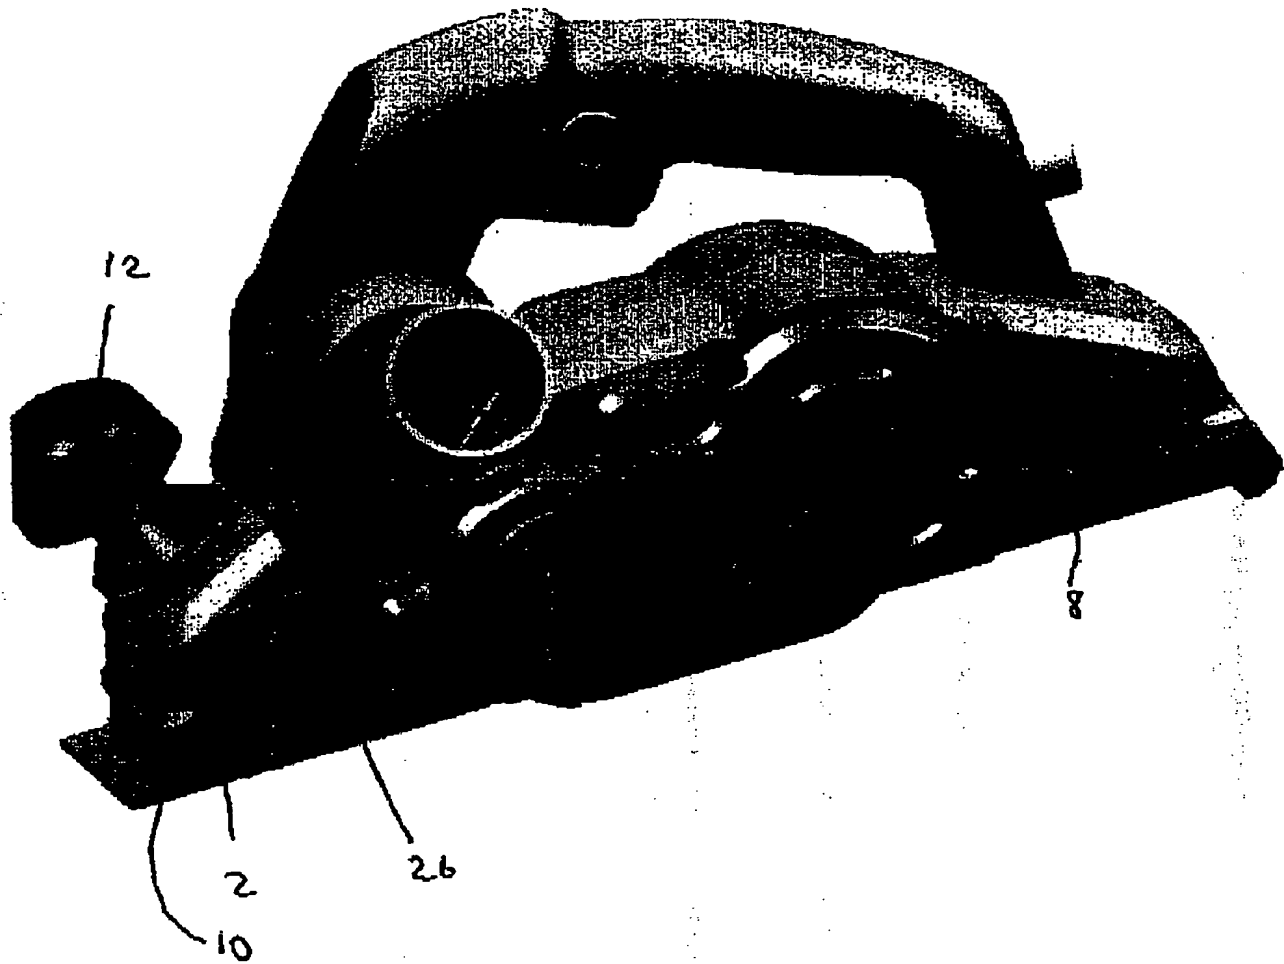


Fig. 2


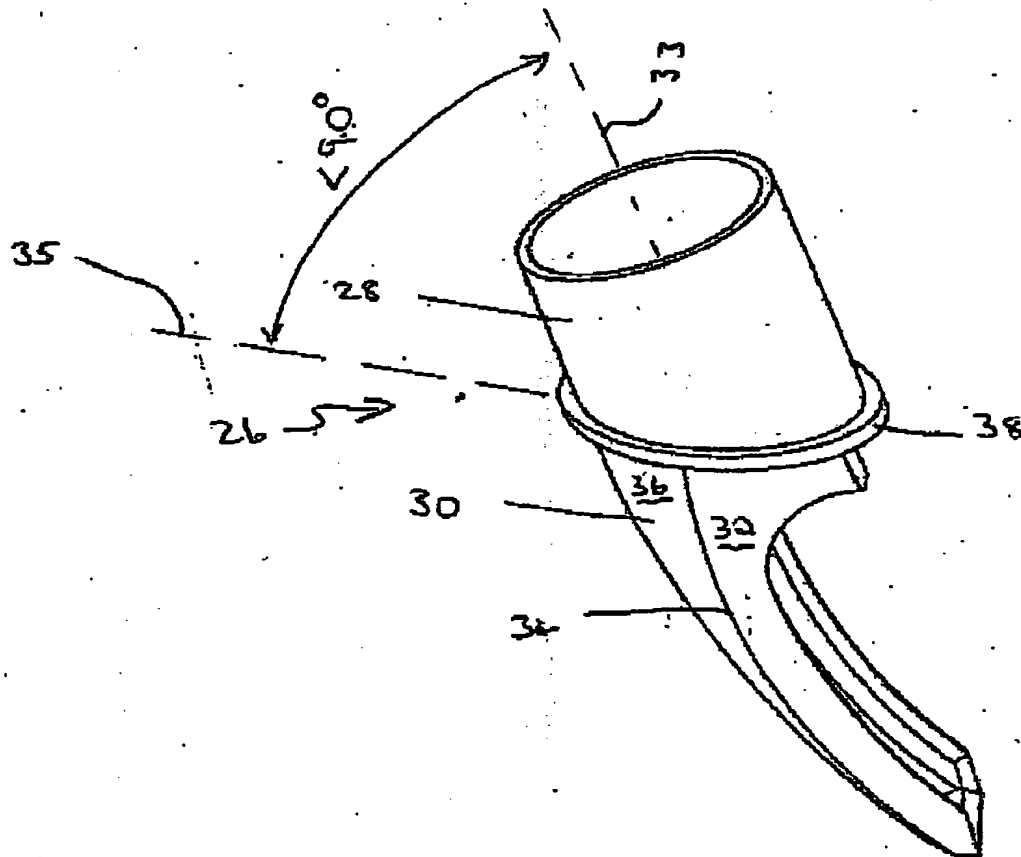


Figure 3

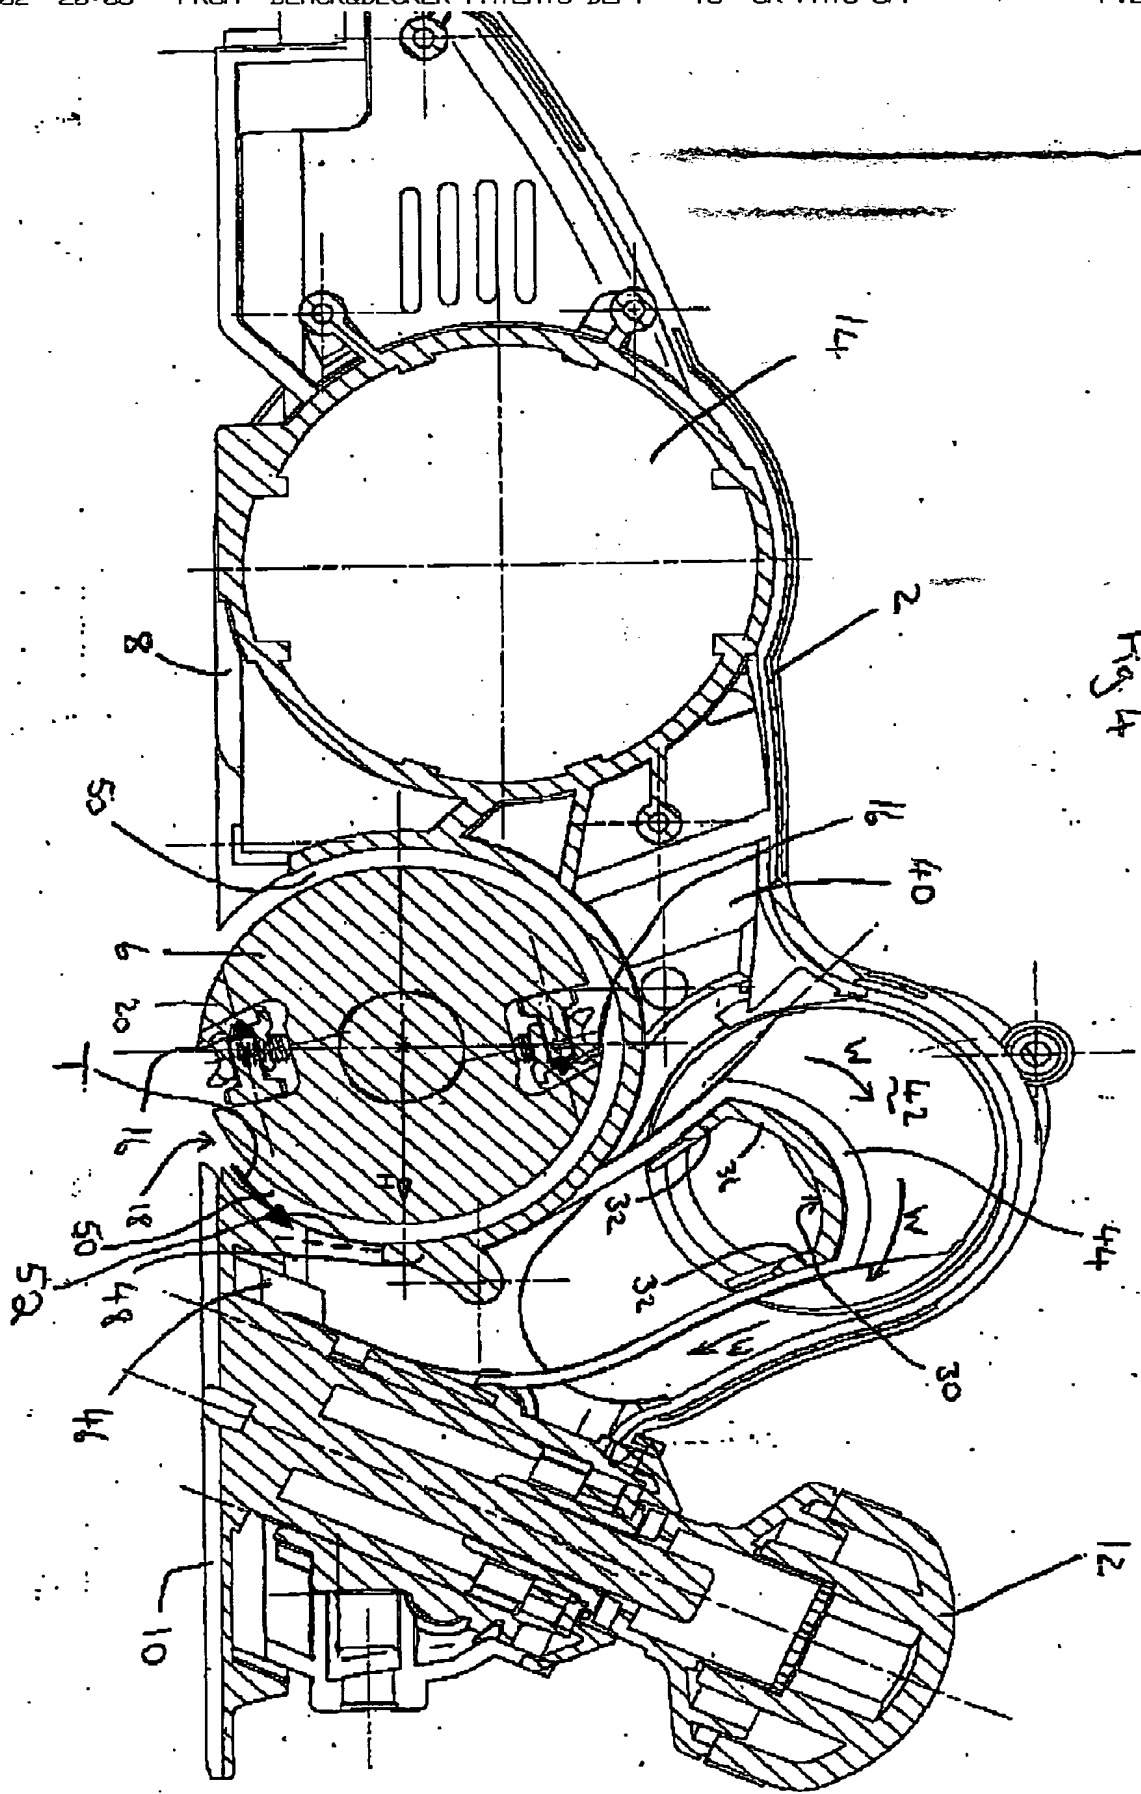


0002/002

BLACK & DECKER

18 FAX 01388 816202

0054910-09-02:08:05

Fig. 5

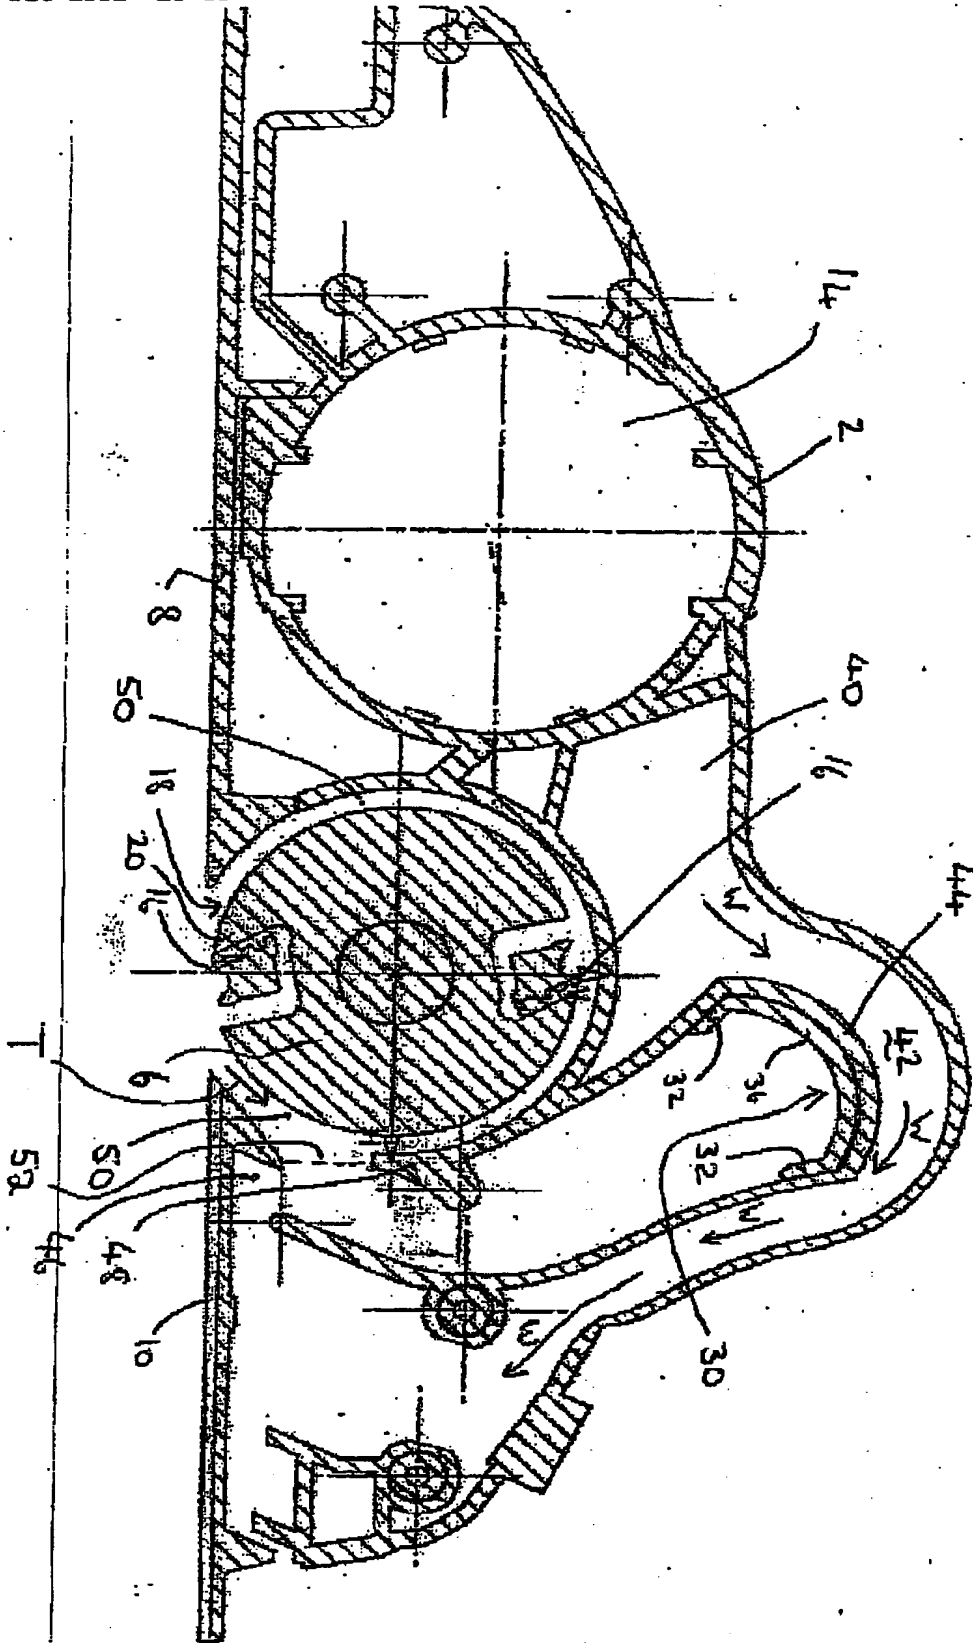


0054910 09:Dec:02 08:05

BLACK & DECKER

1-12 FAX 01288 818202

0054910 09:Dec:02 08:05

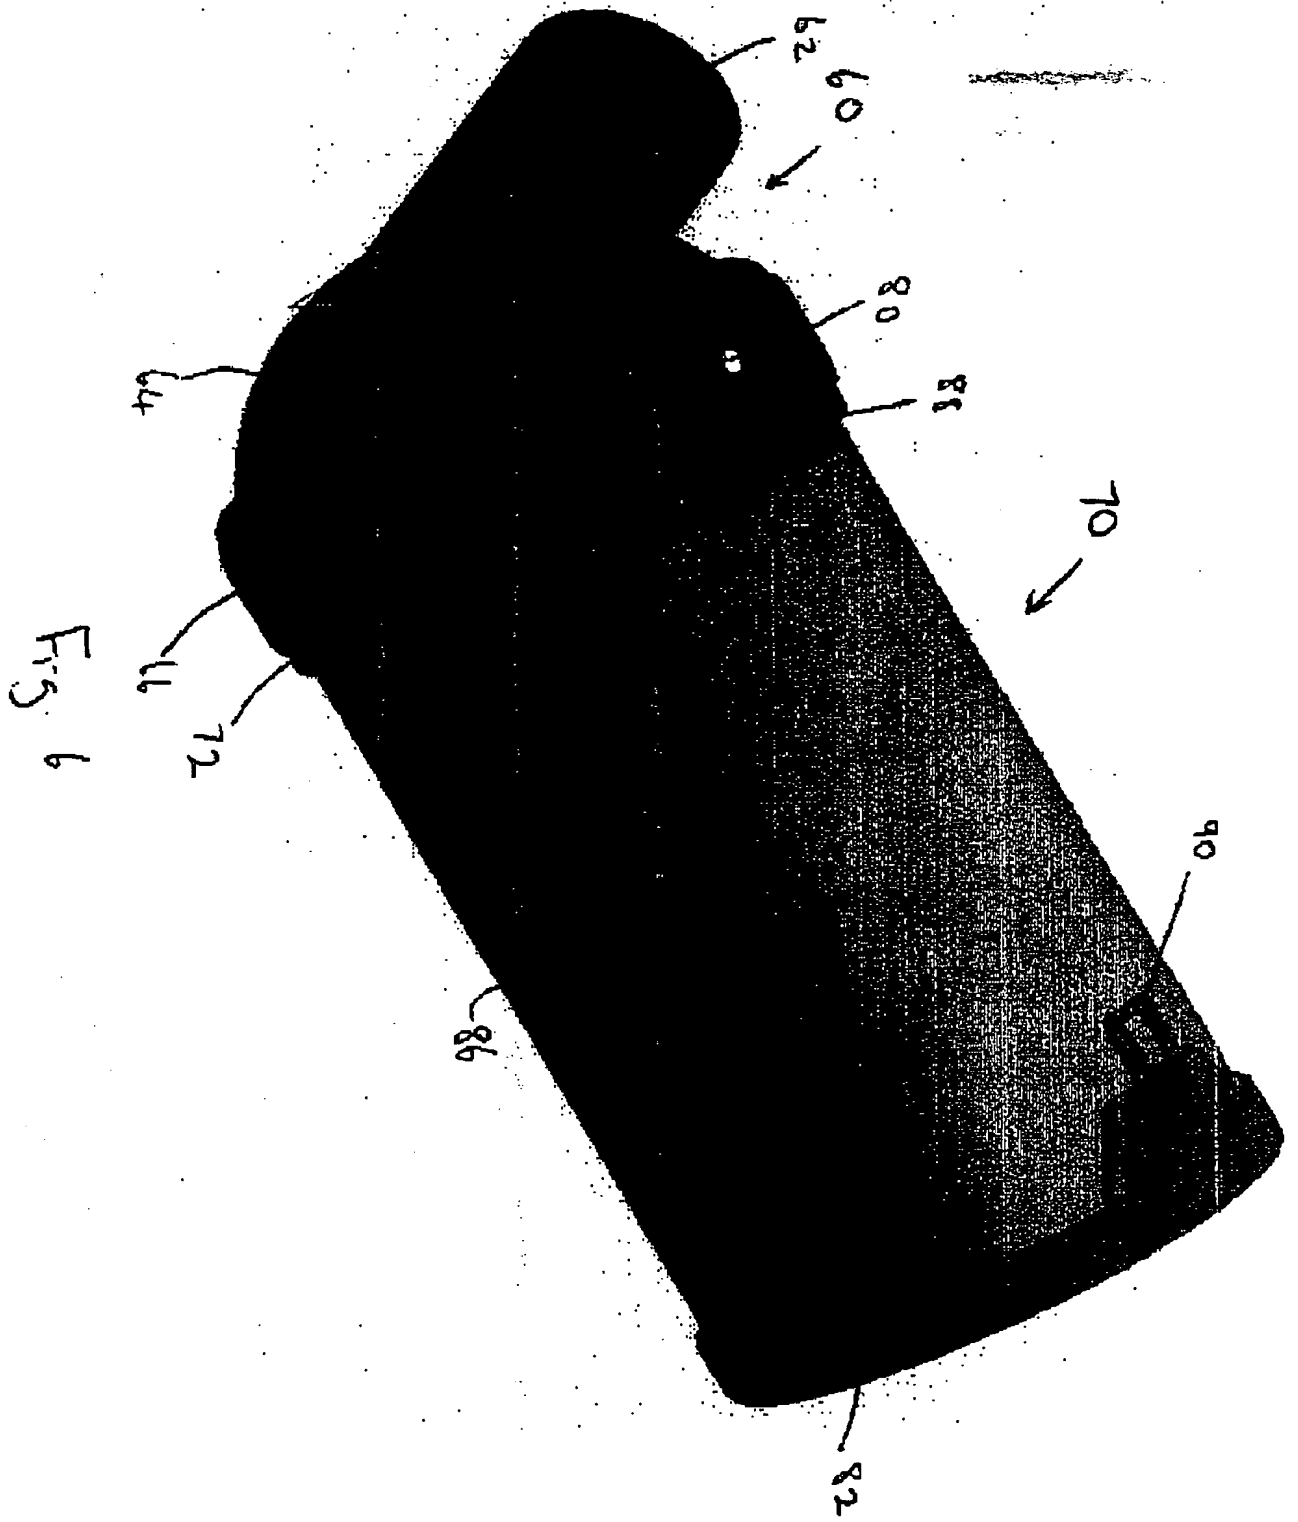


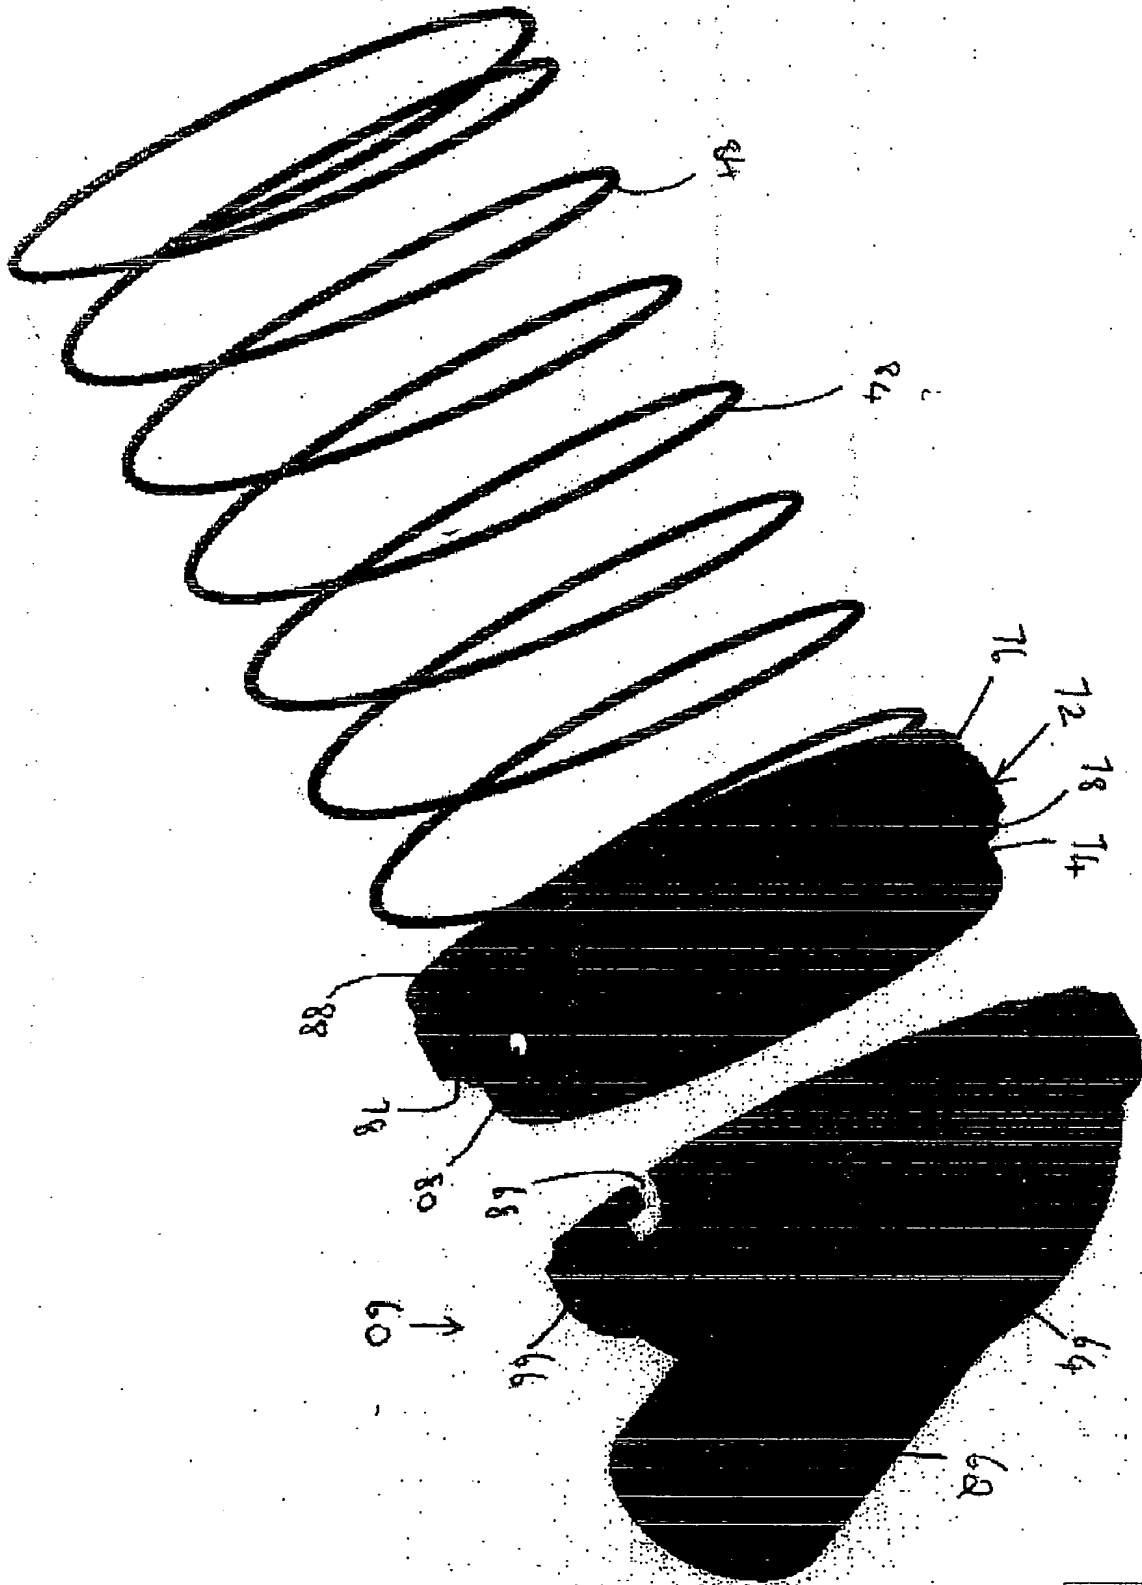


Fig. 7

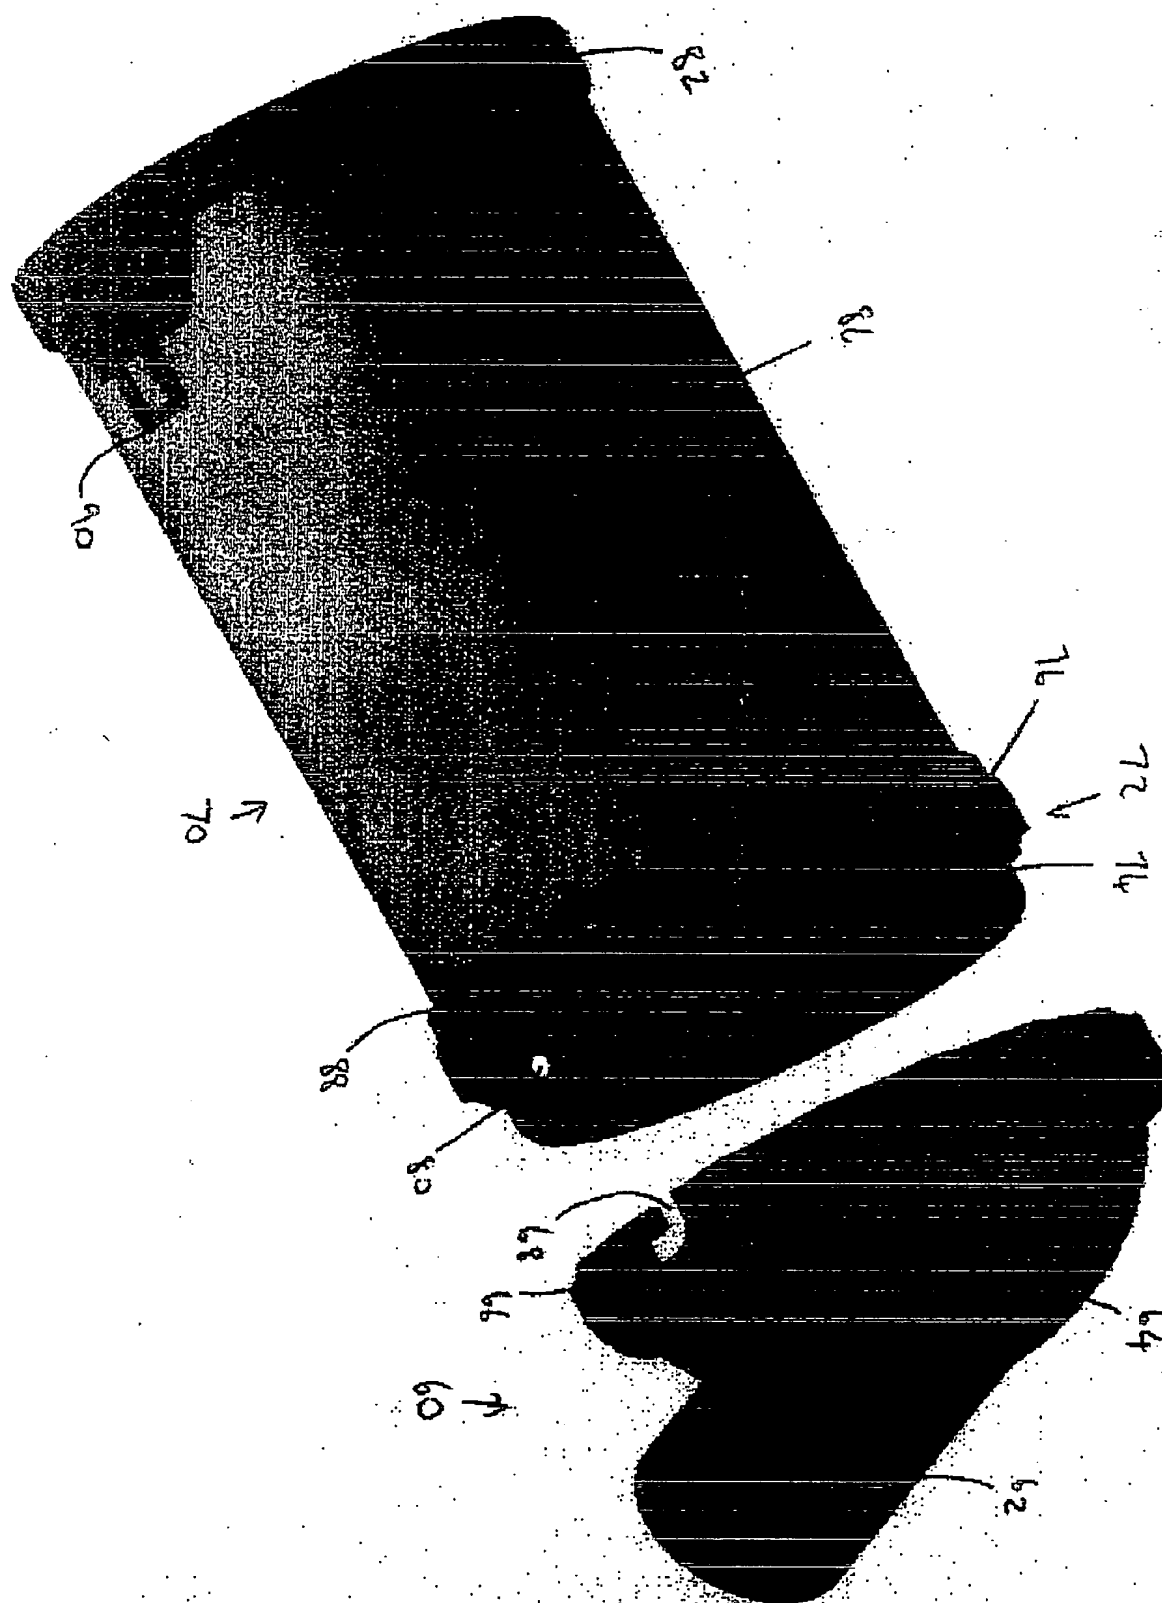

5

Fig 9

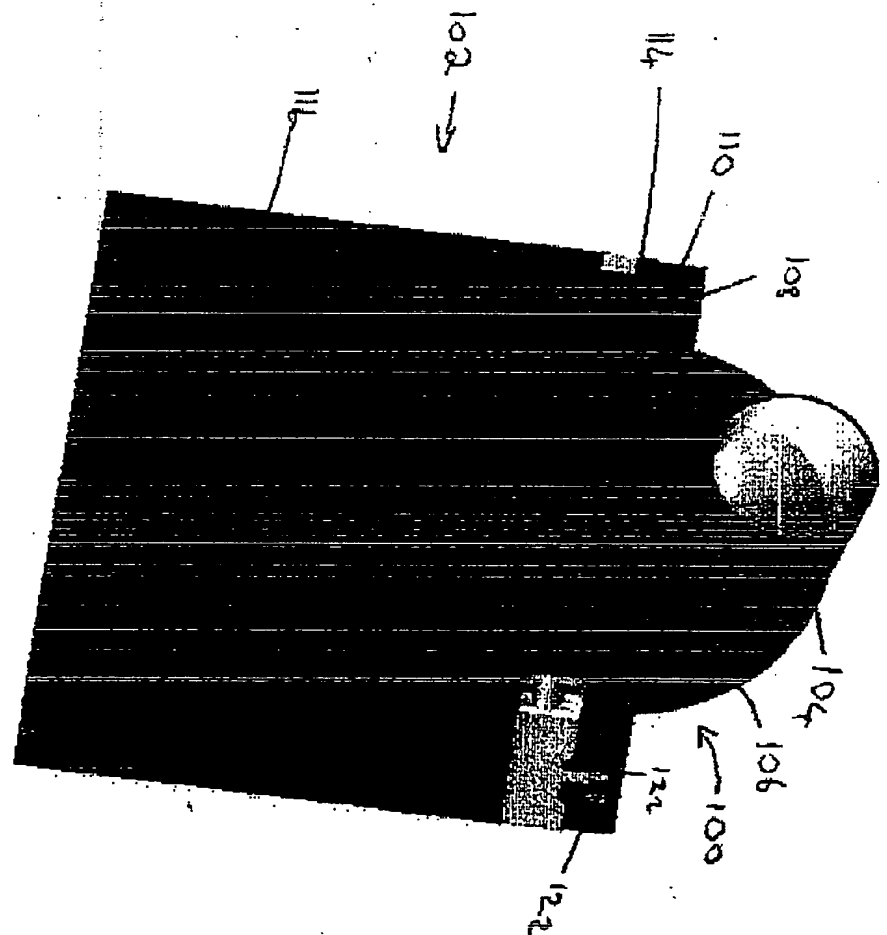


Fig 10

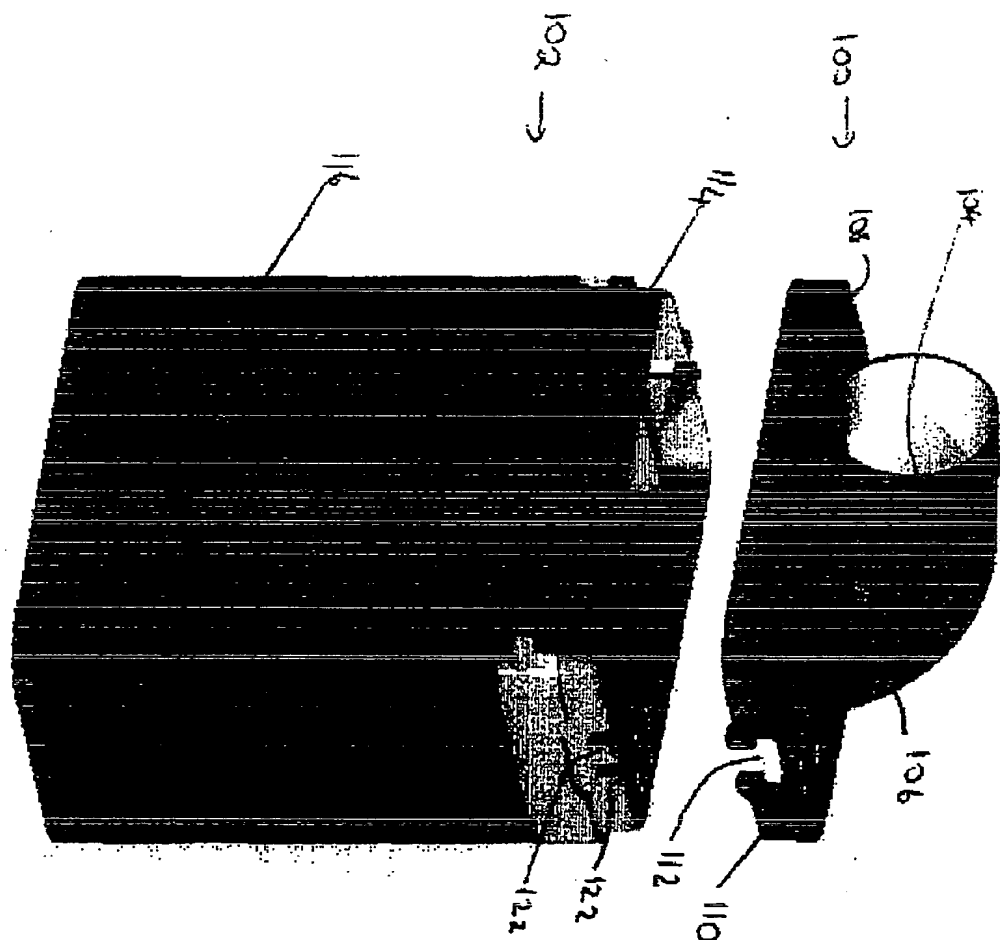
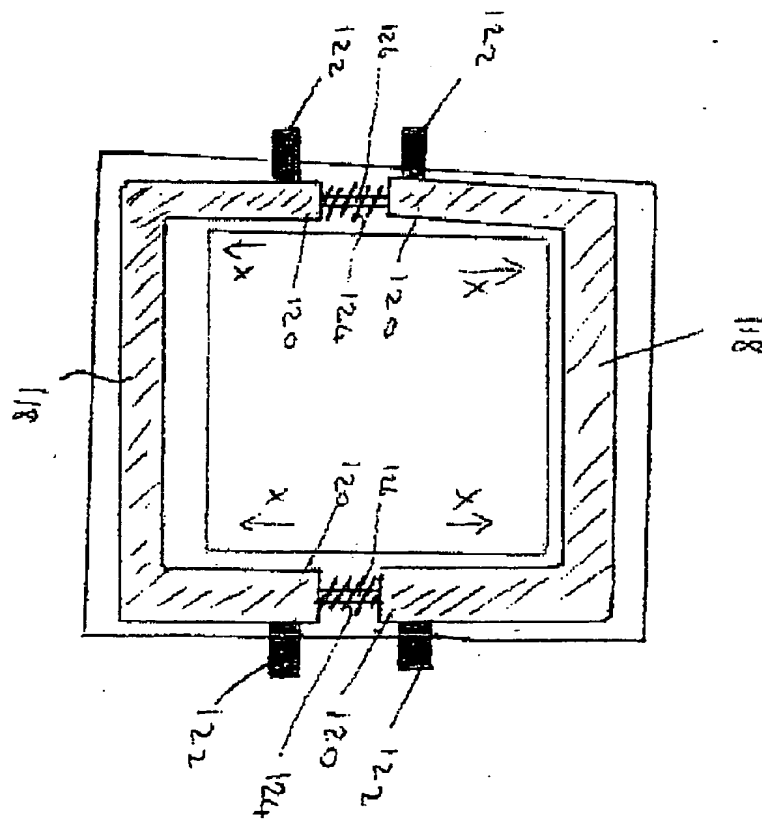
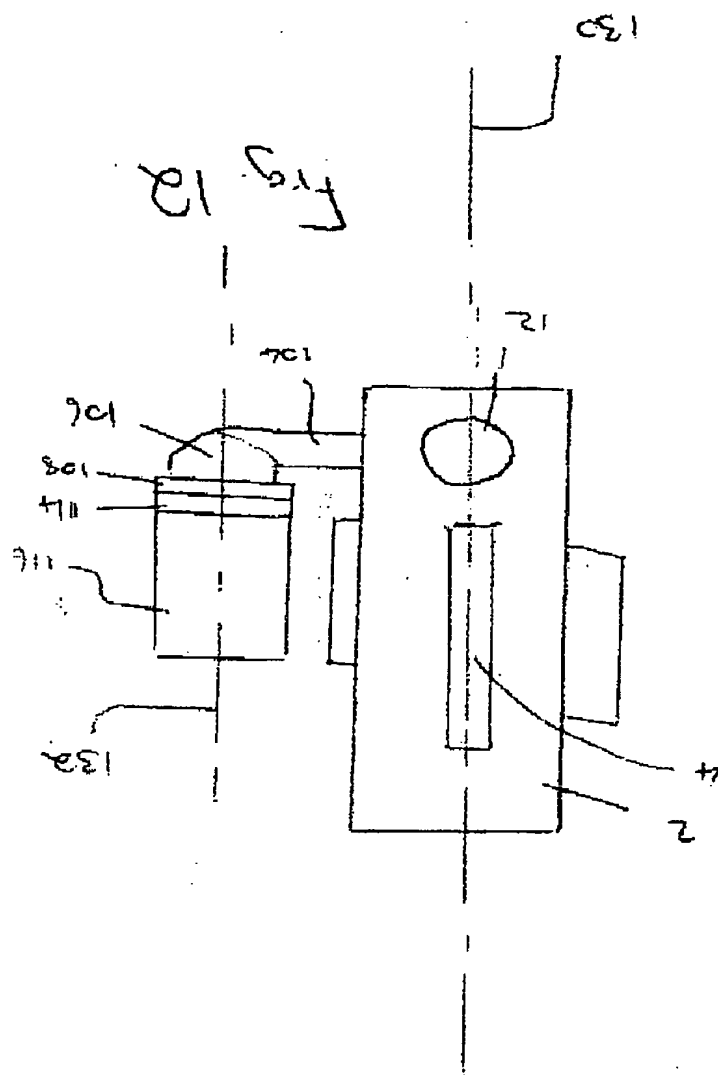


Fig 11





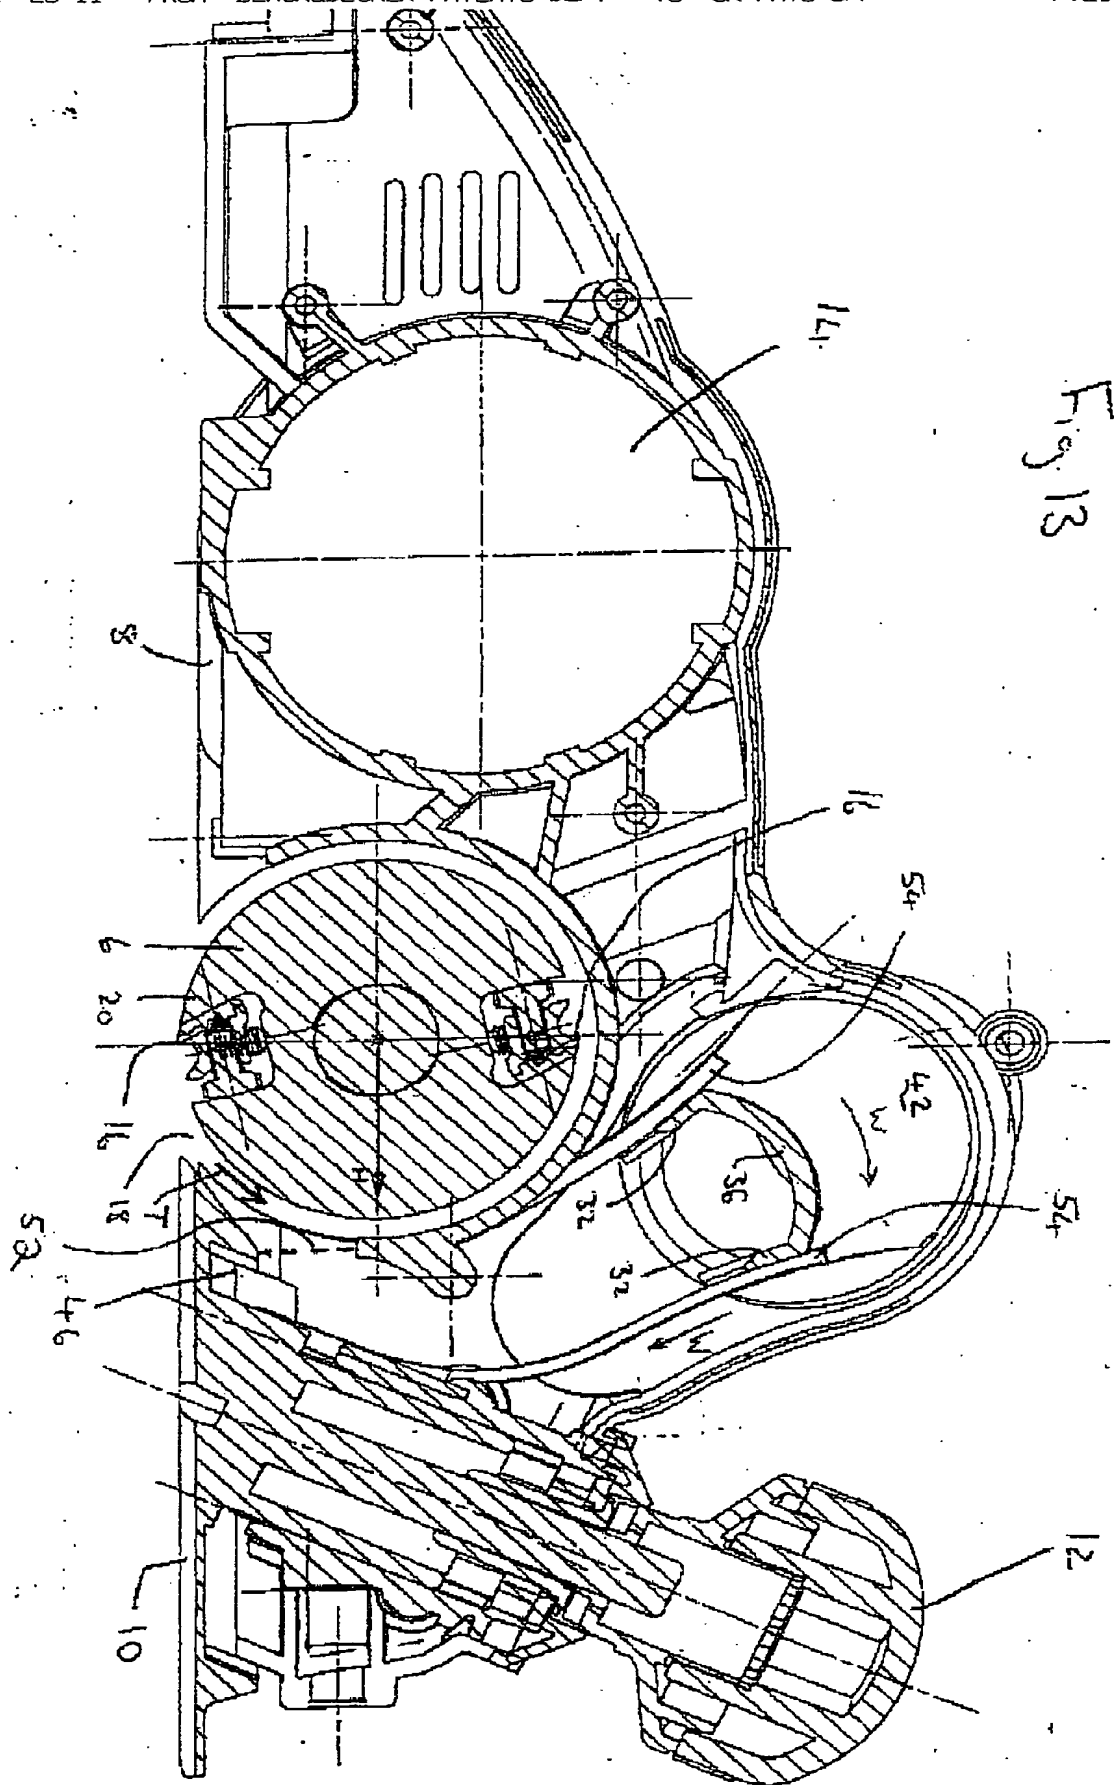
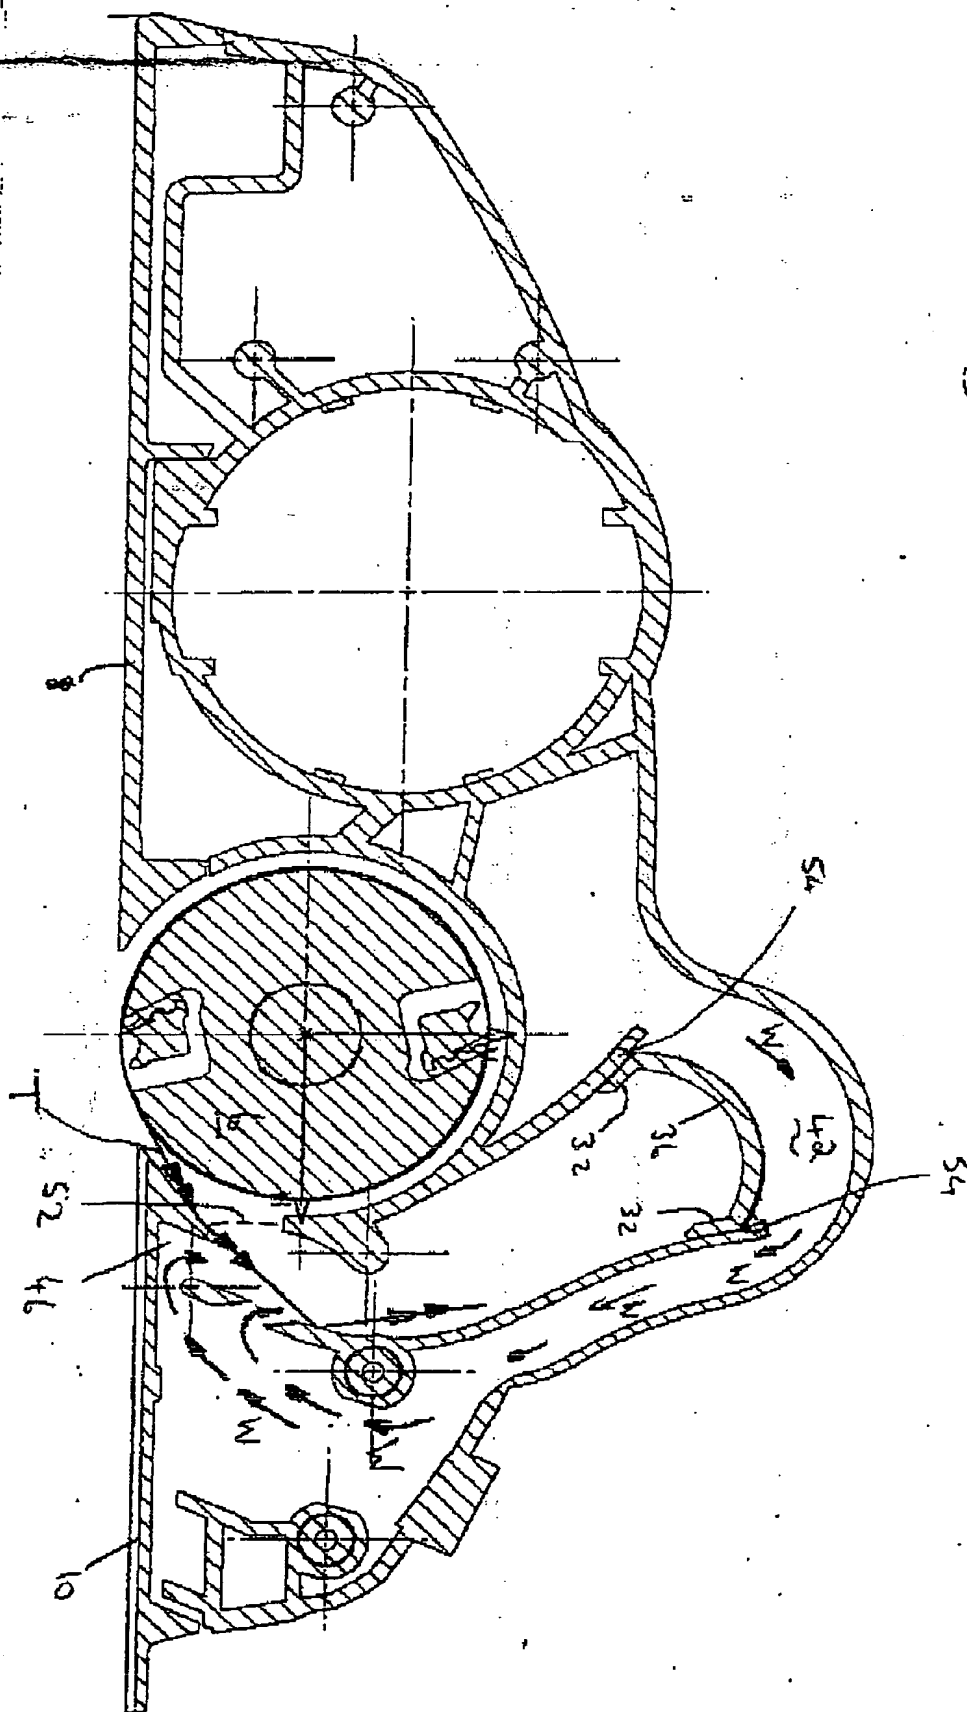


Fig 13

FIG. 14



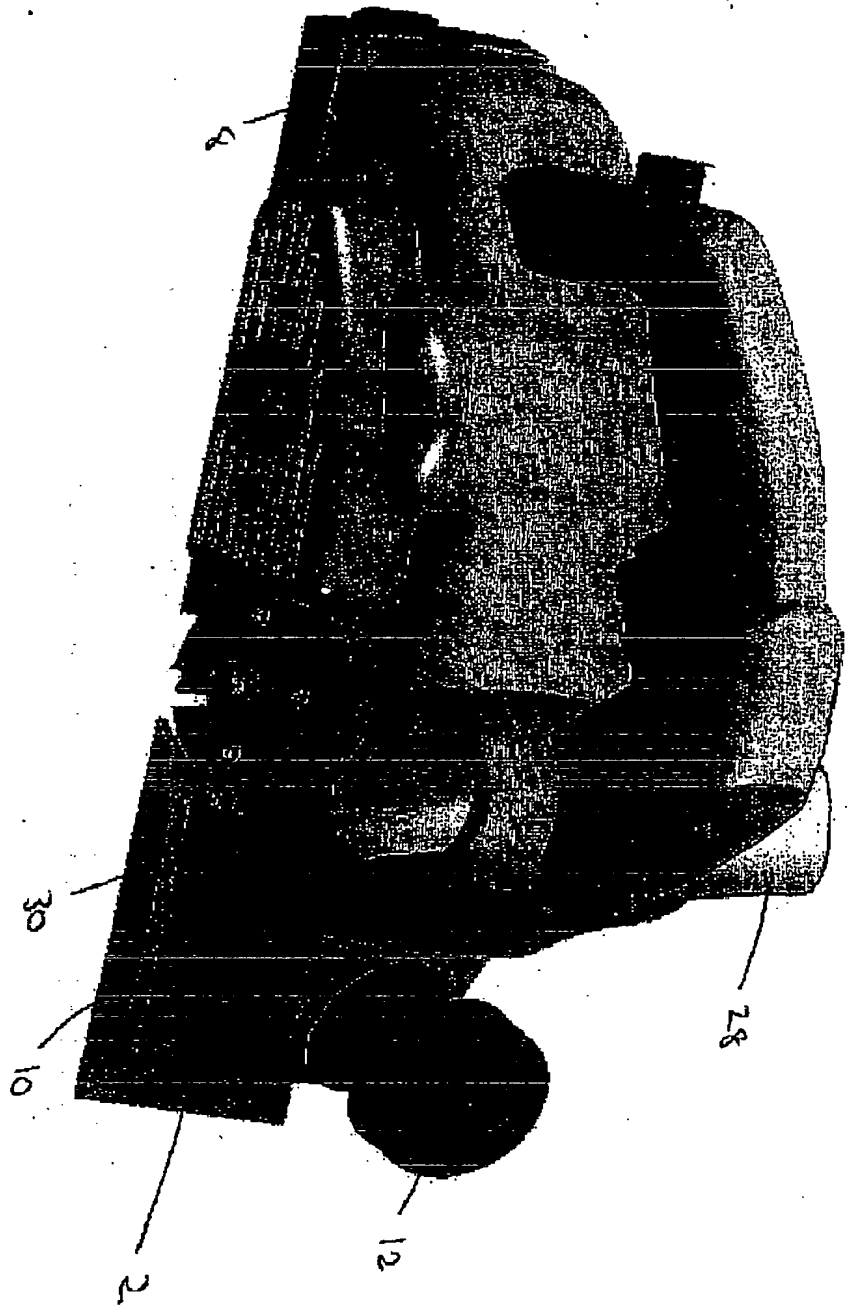


Fig. 15

